


HZL-60HR-B

JUKI[®]

Simple and **easy**

40 Sewing Patterns

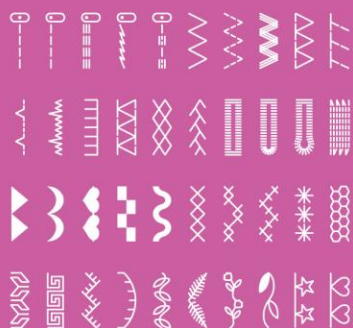

HZL-60HR-B

Sew Comfortably!

Auto Needle Threader



The needle threader easily threads the needle and allows you to start sewing quickly.


Start/Stop Button



The color of the Start/Stop button indicates the status of the machine.

- [Green]
Ready to start or while sewing
- [Red]
Not ready to start
- [Orange]
In bobbin winding condition


Reverse Stitch, Reinforcement Stitch

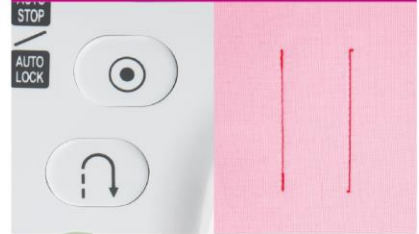

HZL-H series can sew a lock stitch at the beginning and end of sewing. There are two types of lock stitch, reverse stitch and reinforcement stitch.

Sew Firm!

Needle Up/Down Position Button



Press the button to change up/down position of needle instantly. Also you can change needle stop position and can even sew a half stitch.

Buttonhole



HZL-H series sews the buttonhole automatically according to the size of the button.

Presser Foot Pressure



When sewing thin or thick fabrics, you can get comfortable feed.

HZL-60HR-B

■ SPECIFICATIONS

Sewing Speed : Max. 800sti/min
 Needle : HA×1 #9~#18
 Dimensions : 400(W)×290(H)×188(D)mm
 Weight (machine only) : 5.8kg

Easy to Use!

The Current Setting is Very Visible



You can change the size of stitch patterns as well as the needle positions.

Quick Reference Plate



Accessories



- A: Standard Presser Foot B: Zipper Foot C: Decorate Stitch Foot
 D: Overcasting Foot E: Blind Stitch Foot F: Button Sewing Foot
 G: Buttonhole Foot H: Seam Ripper/ Brush I: Screwdriver (S)
 J: Screwdriver (L-shape) K: Auxiliary Spool Pin L: Bobbin (3x) M: Quilt Guide
 N: Spool Cap (Large) O: Spool Cap (Small) P: Spool Pin Felt Q: Pack of Needles (3x)



Hard Case



Foot Controller

Other Features

- Free Arm
- Drop-in Bobbin
- Drop Feed
- Easy to Start Sewing Thick Fabrics
- Button Sewing

JUKI®

JUKI CENTRAL EUROPE Sp. z o.o. ul. Poleczki 21, 02-822 Warsaw, Poland

Tel.: +48 22 545 04 00 / Fax: +48 22 545 04 11

www.jukieurope.com / www.facebook.com/JukiSewIt / e-mail: juki@juki.pl